


E X C E L O N

# Prime Weld

## Thermoplastic Welding Rod

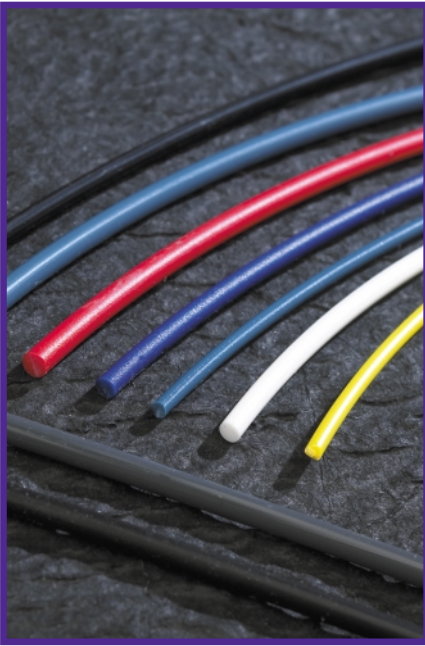

The most important element to successful thermoplastic welding is the filler rod. To insure proper bonding, it is essential that filler rods be made with the same high grade resins used in the material being welded.

Our rod is extruded using only the highest grade resins available.

- Available in a large variety of materials
- Dimensions from .090" to .500"
- Variety of Shapes
- Metric sizes also available

### Available materials:

ABS  
PVC  
LDPE  
LLDPE  
HDPE  
HDPE 3407B  
Polypro  
Copoly  
Styrene  
PETG  
CPVC  
Corzan  
Corzan White 4910  
Urethane I & II  
Polycarbonate  
Kynar

### Dimensions:

.090"  
.125"  
.1563"  
.1875"  
.250"  
.3125"  
.375"  
.500"

### Shapes:

MW  
MWK  
LEISTER  
KST  
OVALS

**Metric sizes also available**



### Thermoplastic Processes

ATPI Partners Corporation

1268 Valley Road

Stirling, NJ 07980-0188

Ph: (888) 554-6400 • (908) 561-3000

Fax: (800) 874-3291 • (908) 753-6749

[www.thermoplasticprocesses.com](http://www.thermoplasticprocesses.com)